


## 38 802 001 **RAPID SL FOR URINAL JOLY AND VISIT**



### MÔ TẢ SẢN PHẨM

- with GROHE Rapido UMB
- roughing-in set for urinal
- for manual actuation or Tectroninfra-red electronic 6 V
- 1.30 m installation height
- front actuation
- steel frame with foil coating/hot galvanized, self-supporting
- for dry-cladding
- quick adjustment, lockable
- fixing material
- TÜV approved
- concealed syphon Ø 50 mm
- water group with stop valve
- flow pressure min 0.5 bar
- operating pressure max 10 bar
- flush aid
- functional unit checked ex factory
- water supply connections ½" outer thread
- installation box with gasket
- Shortable inspection shaft incl. protection during construction phase for sets for final installation with dimensions 116 x 144 mm
- without accessories for on-the-wall installation

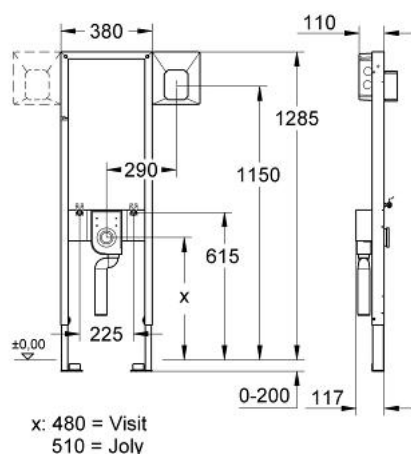

## 38 802 001 **RAPID SL FOR URINAL JOLY AND VISIT**

**PHỤ KIỆN LẮP ĐẶT** , tháng 8 2008 – now

1: Isolating valve (Order-nr. 43392000)

2: Inspection shaft (Order-nr. 66838000)

3: Wall union (Order-nr. 3855800M)\*

\* Phụ kiện đặc biệt

