
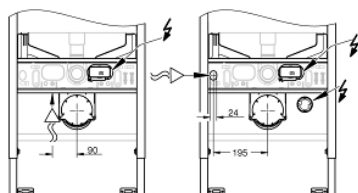


39 597 000 **RAPID SLX ELEMENT FOR WC, 1.13 M INSTALLATION HEIGHT WITH INTEGRATED SOCKET AND SHOWER TOILET CONNECTION**

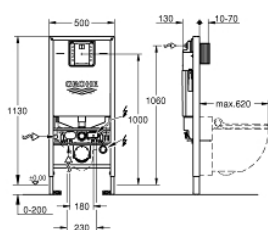

MÔ TẢ SẢN PHẨM (1/2)


- with integrated socket for shower toilets (power)
- ready for shower toilets (water)
- small revision shaft for small flush plates
- for on-the-wall installations or studed walls
- powder coated steel frame, self-supporting
- for dry-cladding, completely pre-assembled
- without outlet pipe
- with fixed connections
- quick adjustment, lockable
- fixing material
- TÜV approved
- 2 WC fixing bolts
- fixing device for ceramic
- distance of fixing bolts 180/230 mm
- depth adjustable
- reducer Ø 90/110 mm
- inlet and outlet connecting set
- flushing cistern GDX, 6 l, containing following features:
 - adjustment ex factory 6l and 3l
- pneumatic discharge valve offering 3 modes of operation: dual flush or start/stop or single flush
- water supply from right, back or top
- low noise (group I acc. to German Noise Specification)
- fully insulated against condensation
- ½" water supply connection including integrated angle valve and push fit flexible hose union
- no tools required for the installation of the inspection shaft incl. protection during construction phase
- for vertical use
- for on-the-wall installation please order wall brackets 38 558 00M (sold separately)

39 597 000 **RAPID SLX ELEMENT FOR WC, 1.13 M INSTALLATION HEIGHT WITH INTEGRATED SOCKET AND SHOWER TOILET CONNECTION**

MÔ TẢ SẢN PHẨM (2/2)

- for mounting of flush plates 156 x 197 mm please order revision shaft 66 791 000 (sold separately)
- including flow manager
- reduces flow of the flush
- prevents overspill in rimless toilets
- easy flow regulation via inspection shaft without removing the valves

39 597 000 **RAPID SLX ELEMENT FOR WC, 1.13 M INSTALLATION HEIGHT WITH INTEGRATED SOCKET AND SHOWER TOILET CONNECTION**

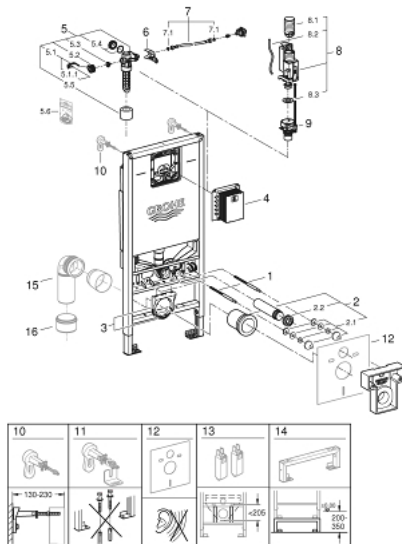

PHỤ KIỆN LẮP ĐẶT, tháng 1 2020 – now

- 1: Threaded bolt (Order-nr. 4276400M)
- 2: WC inlet and outlet connecting set (Order-nr. 37311K00)
- 2.1: Basin fastening (Order-nr. 43511SH0)
- 2.2: Connector (Order-nr. 37119000)
- 3: Support for outlet bend (Order-nr. 42243000)
- 4: Revision shaft for small flush plates (Order-nr. 40911000)
- 5: Filling valve (Order-nr. 42583000)
- 5.1: Lever (Order-nr. 43734000)
- 5.1.1: Ball seal dia. 9x6.8 mm (Order-nr. 4377000M)
- 5.2: Valve head (Order-nr. 43536000)
- 5.3: Membrane (Order-nr. 4375800M)
- 5.4: Screw cap (Order-nr. 43735000)
- 5.5: Valve float, 5 pcs. (Order-nr. 4379100M)
- 5.6: Repl. kit f. seal (Order-nr. 43722000)*
- 6: Support device (Order-nr. 42246000)
- 7: Tube (Order-nr. 42233000)
- 7.1: Seat washer (Order-nr. 0319100M)
- 8: Dual Flush discharge valve AV1 (Order-nr. 42320000)
- 8.1: Extension for overflow pipe (Order-nr. 42313000)
- 8.2: pneumatic hose (Order-nr. 42319000)
- 8.3: Ball seal dia. 9x6.8 mm (Order-nr. 42310000)
- 9: Valve seat (Order-nr. 42593000)
- 10: Wall union (Order-nr. 38558000)*
- 11: Xtra wall brackets, flexible placing (Order-nr. 38733000)*
- 12: Set for noise protection (Order-nr. 37131000)*
- 13: Accessory (Order-nr. 39607000)*
- 14: Extension (Order-nr. 38629000)*
- 15: PP-outlet bend Ø 90 mm (Order-nr. 42327000)*
- 16: 4" Outlet Adaptor F Rapid SI (Order-nr. 42242000)*

* Phụ kiện đặc biệt