


31 360 DC0 MINTA TOUCH ELECTRONIC SINGLE-LEVER SINK MIXER 1/2"

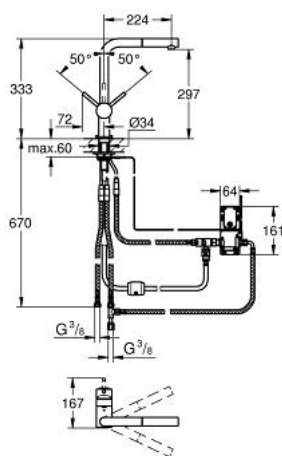

MÔ TẢ SẢN PHẨM

- Colour: Supersteel
- Vòi chậu tay gạt
- Touch: activation of cold water via skin contact
- battery power supply 6 V,lithium-battery, type CR-P2
- CE approved
- indication of battery status by different impulses
- safety shutdown circuit
- solenoid valve
- automatic safety stop 60 sec.(factory pre-set)
- type of protection IP 44
- Lõi van ceramic GROHE SilkMove 46 mm
- Bề mặt mạ GROHE Long-Life
- vòi phun cao hình chữ L
- Bộ giới hạn lưu lượng điều chỉnh được
- Vòi dạng ống xoay được
- Có thể lựa chọn được diện tích quay: 0° / 150° / 360°
- pull out mousseur spout
- automatic returning
- Tích hợp van một chiều
- Dây cấp linh hoạt
- Công nghệ lắp đặt nhanh
- Bảo vệ chống chảy ngược
- optional:
- upgrade for Touch function with mixed water:
- Grohtherm Micro 34 023 000
- connection set 47 533 000
- Áp suất tối thiểu 1,0 bar

31 360 DC0 MINTA TOUCH ELECTRONIC SINGLE-LEVER SINK MIXER 1/2"



PHỤ KIỆN LẮP ĐẶT , tháng 9 2013 – now

- 1: Lever (Order-nr. 46015DC0)
- 2: Shield (Order-nr. 46025DC0)
- 3: Cartridge (Order-nr. 46048000)
- 4: Hand shower (Order-nr. 46858DC0)
- 4.1: Non-return valve (Order-nr. 08565000)
- 4.2: Mousseur (Order-nr. 13967DC0)
- 5: Shower hose (Order-nr. 46881000)
- 6: Shank mounting kit (Order-nr. 46345000)
- 7: Non-return valve (Order-nr. 08565000)
- 8: Snap coupling (Order-nr. 46338000)
- 9: Solenoid valve (Order-nr. 48213000)
- 9.1: Non-return valve (Order-nr. 08565000)
- 9.2: Dirt strainer (Order-nr. 42395000)
- 10: Control unit (Order-nr. 48214000)
- 11: Battery (Order-nr. 42886000)
- 12: Original WAS[®] T-piece 3/8" (Order-nr. 41007000)
- 13: Connection set (Order-nr. 47533000)*
- 14: Thermo scalding protection (Order-nr. 34487000)*
- 15: Lever (Order-nr. 40684DC0)*

* Phụ kiện đặc biệt